
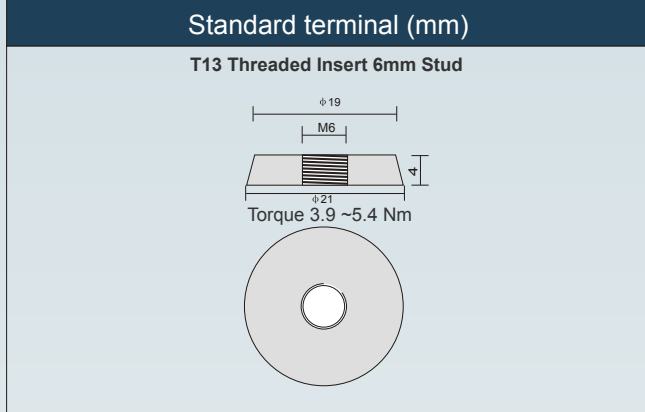


PG Range (12yr Design Life in Float Service at 20°C)

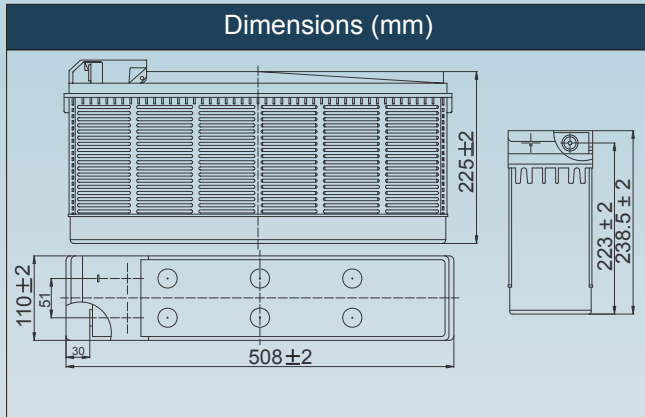

Physical Specification

Nominal Voltage		12V
Nominal Capacity		110.0 AH
Dimension	Length	508 ± 3 mm
	Width	110 + 2 mm
	Container Height	238.5 ± 2 mm
	Total Height (with terminal)	238.5 ± 2 mm
Weight		Approx 35.0kg
Standard Terminal		T13

PGFT-12V110



Discharge Characteristics (25°C, 77°F)

Rated Capacity	20hRate(1.80v/cell) 10hRate(1.80v/cell) 5hRate(1.75v/cell) 3hRate(1.75v/cell) 1hRate(1.60v/cell)	110.0AH 103.8AH 94.5AH 85.8AH 71.0AH	Constant Voltage Charge	Cycle	Initial Charging Current Less than 27.5A Voltage 14.4V ~ 15.0V at 25°C (77°F)

Internal Resistance mΩ

Approx 4.3 mΩ

Constant Current Discharge (Amperes) at 25°C(77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	173.9	145.0	124.4	97.6	75.7	61.5	36.7	26.4	21.2	17.6	15.3	11.90	9.92	5.26
1.80V/cell	197.2	161.6	137.7	106.8	81.4	65.7	38.7	28.1	22.3	18.5	16.1	12.50	10.38	5.50
1.75V/cell	216.4	174.9	146.9	112.2	84.5	68.0	39.4	28.6	22.9	18.9	16.3	12.70	10.49	5.58
1.70V/cell	231.5	184.2	152.9	115.5	86.5	68.9	40.0	28.8	23.0	19.0	16.5	12.80	10.56	5.62
1.67V/cell	239.5	188.8	156.0	117.0	86.8	69.2	40.1	28.9	23.1	19.1	16.6	12.90	10.65	5.65
1.60V/cell	251.8	196.0	163.0	119.9	89.1	71.0	40.8	29.3	23.4	19.3	16.7	12.98	10.80	5.68

Constant Power Discharge (Watts/cell) at 25°C(77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	324.8	273.4	237.0	187.9	147.0	119.9	72.0	52.0	41.9	34.8	30.3	23.7	19.8	10.52
1.80V/cell	363.9	300.7	258.5	202.5	156.9	127.3	75.4	55.0	43.8	36.4	31.7	24.9	20.7	10.98
1.75V/cell	393.0	321.4	273.3	211.1	161.4	131.2	76.6	55.7	44.8	37.1	32.1	25.2	20.9	11.14
1.70V/cell	411.0	333.9	282.2	216.1	164.5	132.5	77.5	56.2	45.0	37.2	32.5	25.4	21.0	11.21
1.67V/cell	423.6	340.8	286.8	218.4	164.5	132.8	77.6	56.1	45.1	37.3	32.6	25.5	21.2	11.25
1.60V/cell	433.0	346.9	295.4	221.0	167.0	134.9	78.2	56.5	45.4	37.6	32.7	25.6	21.4	11.30



Power-Sonic Europe Limited
3 Buckingham Square, Wickford, Essex, SS11 8YQ
Tel: +44 (0)1268 560686 Fax: +44 (0)1268 560902
sales@power-sonic.co.uk
www.power-sonic.co.uk